

IPS-2000


Paraffin Injection Machine

Solid paraffin injection machine with tank with georotor type pump.

Technical Features:

- Power Supply 200/240 V (1Ph) 50/60 Hz
- Compressed Air Supply 5 to 7 bar
- Installed Power 3.5 kW
- Noise <70 dB
- Nominal Cadence 4.7 Kg/hour

Dimensions:

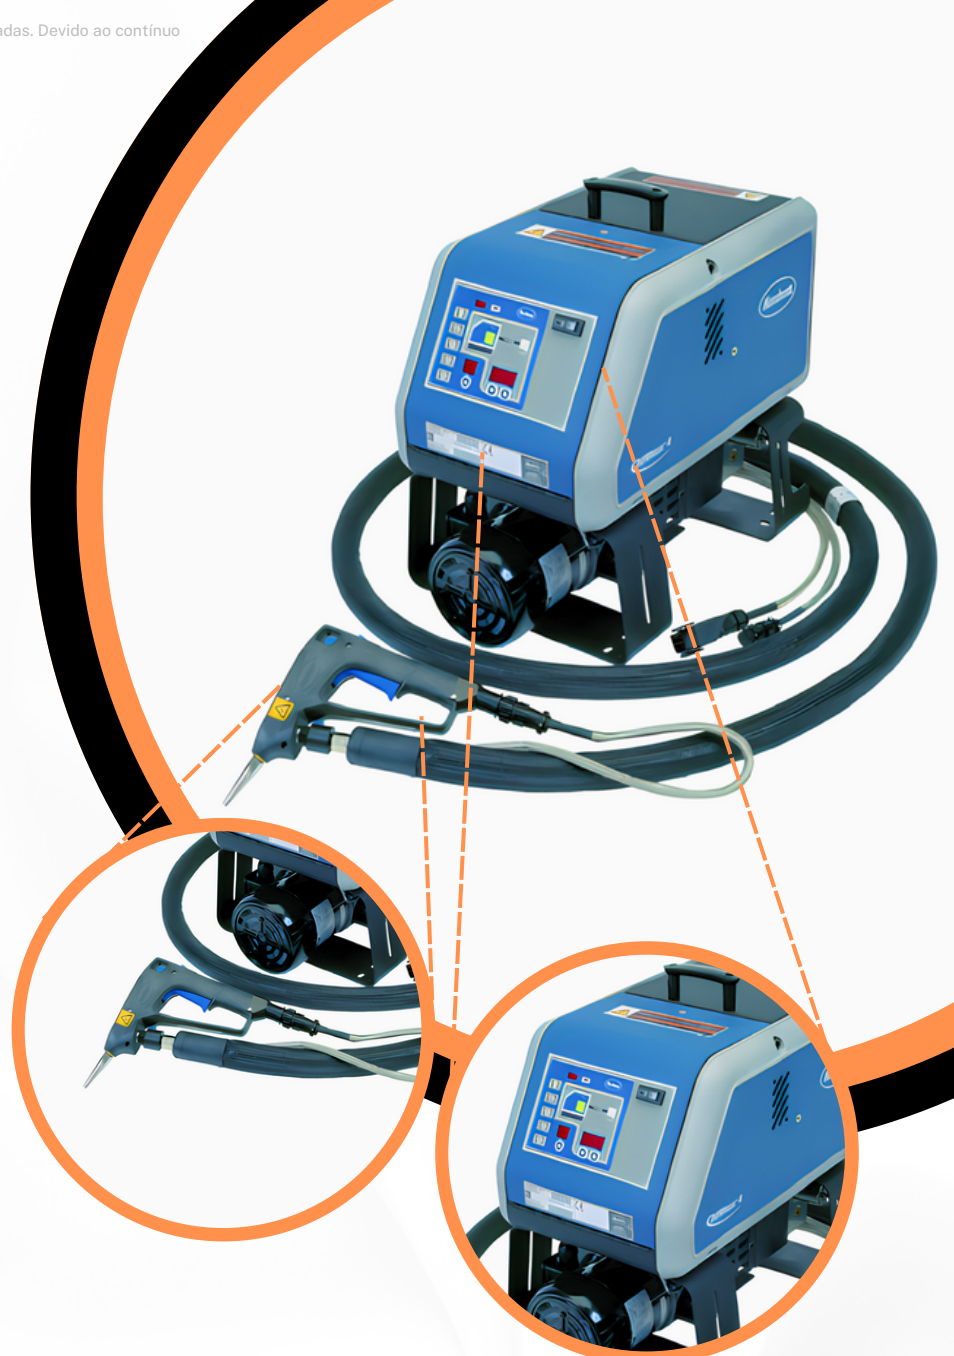

General Features:

- Maximum hydraulic working pressure of 40 bar ✓
- Working temperature range between 40°C to 230°C ✓
- Ambient temperature range from 0° to 50°. ✓
- Temperature control stability of +/- 0.5°C ✓
- 4L and 3.9 Kg capacity ✓



Contact Us

+351 22 747 15 70

geral@azevedosindustria.com

www.azevedosindustria.com
Lourosa, Portugal

