

OEP-200


Electropneumatic Cork Guider (Double)

Automatic orientation of chamfered stoppers through shape recognition.

Technical Features:

- Power Supply 415/240 V (3Ph+N+T) 50Hz
- Compressed Air Supply 5 to 7 bar
- Installed Power 0.5 kW
- Noise <70 dB
- Nominal Cadence 12,000 stoppers/hour
- Admissible cork diameter (min; max) 19; 31mm
- Admissible cork length (min; max) 27; 49mm

Dimensions: 845 mm x 784 mm x 1721 mm

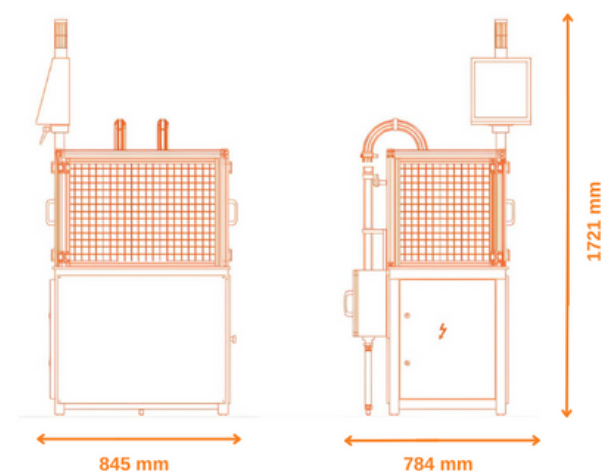

General Features:

- High repeatability ✓
- Adaptable to marking, capsuling, top rectifying, chamfering, and other equipment ✓
- Counting system with pre-selection ✓



Contact Us

+351 22 747 15 70

geral@azevedosindustria.com

www.azevedosindustria.com
Lourousa, Portugal

