

MANTER FICHA
TÉCNICA. RETIRAR
SITE

Marking Process

MF/C-3000 Cork Bodies Fire Brander



Branding bodies of corks by fire, this is, using natural or propane gas to heat the cliché which are in contact with corks.



Source

Power Supply
415/240V (3Ph+N+T) 50 Hz



Power

Installed Power 1.5 kW



Compressed Air

Compressed Air Supply
NA



Noise

< 70 dB



Cadence

Nominal Cadence
12 000 corks/hour
(45x24 mm)



Diameter

Admissible Cork Diameter:
21mm; 31mm (min; max)




Length

Admissible Cork Length:
33mm; 54mm (min; max)

General Features

- ✓ Feeding system can be defined by the customer;
- ✓ Possibility to program a number of corks to be printed. Eg.: Batch dimension.

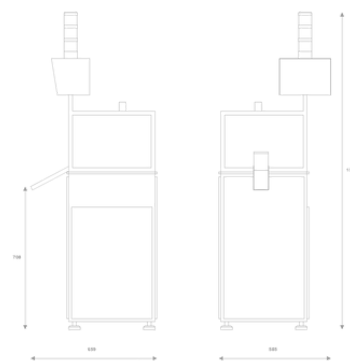

Dimensions

H 1570 mm x D 659 mm x W 585 mm



www.azevedosindustria.com
Lourosa, Portugal

+351 22 747 15 70 (Call cost for national fixed network) ▪ geral@azevedosindustria.com

